



A Brand by Hankook Tire



™/© 2023 MLB


### **Tire that fits**

Laufenn is a life-fit brand tailor made for drivers who appreciate safety, innovation and value in their products. Created for people who are searching for excellent everyday performance with competitive prices. Simplicity, Quality, and Technology are what makes the brand unique; their great performance and minimalist design allow drivers to fit Laufenn tires to any make and model, and fulfill the need and lifestyle of customers around the world.

	<b>Z FIT</b> Premium sports	Wet	Dry	Handling	Sport
	<b>S FIT</b> Premium performance	Wet	Dry	Handling	Fuel Efficiency
	<b>G FIT</b> Touring	Wet	Dry	Comfort	Wear Life
	<b>X FIT</b> On/off road	Durability	Comfort	Wear Life	Off Road
	<b>FFT</b> Winter	Snow	Wet	Ice	Traction

Any weather, Any road condition. You can have it all.



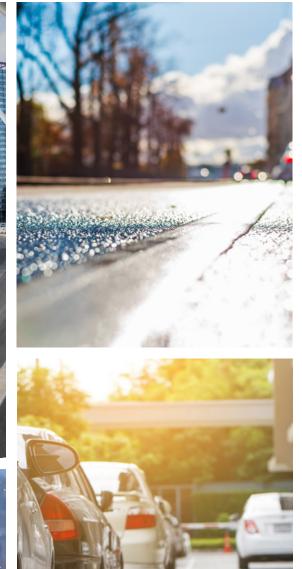






### Multi Performance Tire

The G FIT 4S is the ideal choice for drivers looking for exceptional performance, value, and safety year-round.

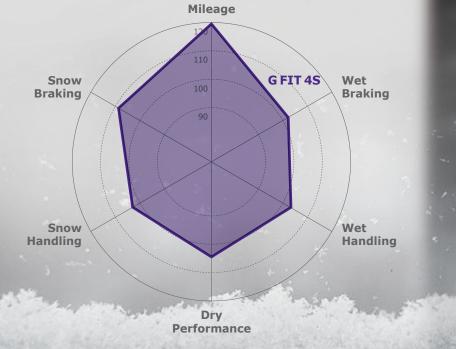





G FIT 45	M+S
Speed Symbol	H~W
S.W.	185~245
Series	40~70
Inch	15~20
UTQG	640 B A


#### FEATURES

All-weather tire for all year round Hybrid Performance (Dry, Wet & Snow) High Grip Compound for any road condition 3PMSF(Snowflake mark), M+S

# Handling

The G FIT 4S hybrid performance tire guarantees optimum handling in all weather and any road conditions.

Snow



#### Wider Drainage Grooves

The uniquely streamlined aqua lateral grooves of the tire expand from the center outwards in the contact area. This enhances drainage in snowy and rainy conditions, by expelling precipitation on the road away from the tire.

#### Optimized strong sidewall

Greater streering stability through the adoption of high-hardness bead filler with covered sidewall rubber. Strand bead wires improve uniformity and duarability.



#### Angled Semi-Groove

Uniquely designed semi-grooves to enable impressive steering at all angles. This also provides stable grip by maximizing the edge effect of the groove and the contact area on the road.



## Mileage

Well-Balanced technology provides secure driving, from beginning to end, with long tread life.




#### Even Tread Wear

By utilizing Convex TR (Tread Radius) technology, the grounding pressure for each rib block is uniformly distributed. This leads to a well-balanced contact shape that improves wear performance. The G FIT 4S tire utilizes Convex TR technology to achieve this result.

#### New Four-Season High Performance Compound

The new silica and performance resin compound improves wear and snow performance by maintaining flexibility, even in situations where the rubber of a tire becomes hard and loses its flexibility due to cold temperatures or braking.






## **Grip control on Wet Roads**

The G FIT 4S provides optimal grip control on wet roads, ensuring safe and reliable driving performance in wet conditions.



#### Performance Resin Compound

Performance resin compound is applied to provide excellent wet grip performance even in wet road conditions.




#### Interlocking Centre Block

The blocks interlocked in the center of the tire provide block stiffness and rigidity, resulting in stability, comfort, and control for drivers



## Winter performance


The G FIT 4S provides reliable and safe driving performance even in winter. This is proven by certification mark on winter regulations.



#### The Wave-type 2D sipe

The wave-type 2D sipes are applied to the shoulder area of the tire to maximize the snow grip and deliver impressive cornering performance. The linear shape 3D sipe

The high density application of the linear 3D sipes ensures safety and grip due to enhanced contact area.



### Flexible rubber technology

Impressive grip all year round – the enhanced flexibility of the tire, due to the silica compound used, ensures driver safety and comfort on any road conditions, even in winter.

### **Available Sizes**

#### 15 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
185/65R15H	88	Н	4	В	640 B A	1030193
195/60R15H	88	Н	4	В	640 B A	1030194
195/65R15H	91	Н	4	В	640 B A	1030195
205/65R15H	94	Н	4	В	640 B A	1030196

#### 16 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
205/55R16V XL	94	V	4	В	640 B A	1030197
205/60R16V XL	96	V	4	В	640 B A	1030198
205/65R16H	95	Н	4	В	640 B A	1030199
215/55R16W	93	W	4	В	640 B A	1030200
215/60R16V	95	V	4	В	640 B A	1030201
215/65R16V	98	V	4	В	640 B A	1030202
215/70R16H	100	Н	4	В	640 B A	1030203
225/60R16H	98	Н	4	В	640 B A	1030204
235/70R16H	106	Н	4	В	640 B A	1030205

#### 17 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
205/50R17W XL	93	W	4	В	640 B A	1030206
215/45R17W XL	91	W	4	В	640 B A	1030207
215/50R17W XL	95	W	4	В	640 B A	1030208
215/55R17W XL	98	W	4	В	640 B A	1030209
225/45R17W XL	94	W	4	В	640 B A	1030210
225/50R17V	94	V	4	В	640 B A	1030211
225/55R17W XL	101	W	4	В	640 B A	1030212
225/60R17H	99	Н	4	В	640 B A	1030213
225/65R17H	102	Н	4	В	640 B A	1030214
235/50R17V	96	V	4	В	640 B A	1030215
235/55R17W XL	103	W	4	В	640 B A	1030216
235/60R17H	102	Н	4	В	640 B A	1030217
235/65R17V XL	108	V	4	В	640 B A	1030218
245/65R17H	107	Н	4	В	640 B A	1030219

#### 18 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
225/40R18W XL	92	W	4	В	640 B A	1030220
225/45R18W XL	95	W	4	В	640 B A	1030221
225/50R18W	95	W	4	В	640 B A	1030222
225/55R18V	98	V	4	В	640 B A	1030223
225/60R18H	100	Н	4	В	640 B A	1030224
235/45R18W XL	98	W	4	В	640 B A	1030225
235/50R18V	97	V	4	В	640 B A	1030226
235/55R18V XL	104	V	4	В	640 B A	1030227
235/60R18W XL	107	W	4	В	640 B A	1030228
235/65R18V	106	V	4	В	640 B A	1030229
245/40R18V XL	97	V	4	В	640 B A	1030230
245/45R18W	96	W	4	В	640 B A	1030231
245/60R18V	105	V	4	В	640 B A	1030232

#### 19 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
235/55R19W XL	105	W	4	В	640 B A	1030233
245/40R19W	94	W	4	В	640 B A	1030234
245/45R19W	98	W	4	В	640 B A	1030235

#### 20 inch

Size	Load index	Speed Symbol	Ply Rating	Sidewall Type	UTQG	S CODE
245/50R20V	102	V	4	В	640 B A	1030236