



Laufenn offers a product for all professional transport partners

The Laufenn brand offers customers that are seeking value, quality and performance a wide range of quality products to meet a broad variety of driving conditions. No matter the season, no matter the road conditions, Laufenn will bring you reliably throughout your journey.

Manufactured by a premium TBR manufacturer

Laufenn tyres are designed by experienced engineers at state-of-the-art facilities in order to provide high tech products fitting to all the needs and expectations of demanding customers. The products are produced with the latest automated equipment at large scale ISO-certified plants, where quality is guaranteed.

Built with Quality and Reliability in mind

The Laufenn quality policy provides superior products and services to satisfy the needs of our customers all over the world. In this quickly changing world we offer you up-to-date products that target your day-to-day needs and help you to reach your destinations at ease.

The value choice for professional partners

Making sure that you can extract all of the value designed and manufactured into the tyre range. Laufenn tyres are designed to deliver maximum mileage performance, making them the right choice for the 'value' focused transport professional.



Trailer Tyre for Regional Haul Application





Se

Trailer tyre for regional haul application. The wide and solid shoulder design ensures high mileage and prevents belt separation. The sem-zigzag grooves increase the stone rejection and counter groove cracks.





FEATURES

Optimised pattern design for regional trailer axle.

LF91

Speed Symbol: K / L **N.S.W**: 385~425 **Series**: 55~65

Inch: 22.5

EU Label: C~B/C/W1



Regional Trailer Tyre









Regional trailer tyre with wide tread and deep grooves provide excellent mileage.



Zigzag Groove

The groove angles with semi-zigzag design for an excellent stone ejection.


Wide and Solid Shoulder Design

Wide and solid shoulder design for long mileage and to provide belt separation. Wide shoulders improve stability and reduces uneven wear.



Compound Mixing System

The Innovative Mixing System (IMS) minimises the disconnection of polymer chains and oxidation.



dispersion level Low bonding rate with carbon black

Disconnected


polymer

IMS

Standard

Advantages of Wide Base Single Tyres

Wide base single tyre performance for low cost and high safety.

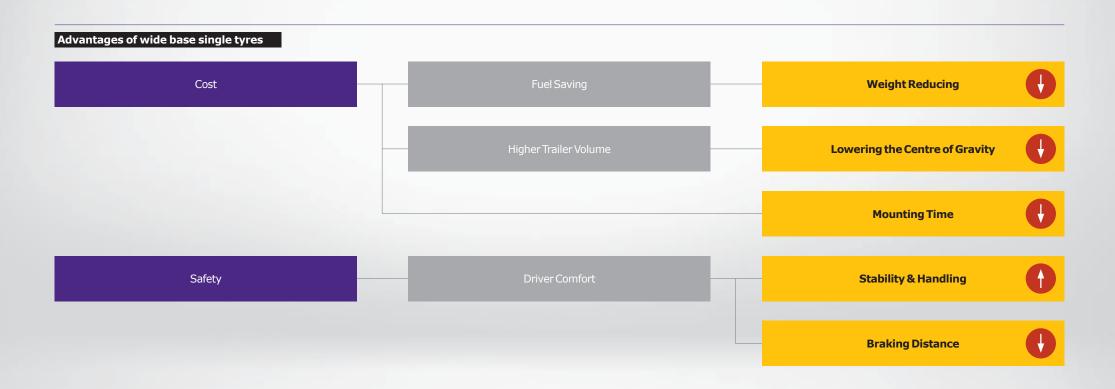

AVAILABLE SIZES


Size	LI/SS	Ply	Measured Rim		Max.Air			Max.Load				Overall Diameter	Section Width	Tread Width	Tread Depth	Static Loaded	Tyre labelling class				Markings
			Kiiii	PSI		bar		kgs		lbs		Diameter	Widti	Width	Бериі	Radius	€	181 ogg)	
				S	D	S	D	S	D	S	D	mm	mm	mm	mm	SLR		2	1		
Tubeless																					
385/55R22.5	160K (158L)	P18	11.75	130 (120)		9.0 (8.3)		4500 (4250)		9920 (9370)		1000	377	320	13.5	457	В	С	70	W1	M+S 🕸
385/65R22.5	160K (158L)	P18	11.75	130 (120)		9.0 (8.3)		4500 (4250)		9920 (9370)		1085	383	308	15.5	503	С	С	70	W1	M+S 🕸
425/65R22.5	165K	P20	13.00	120		8.3		5150		11400		1129	422	316	15.0	518	С	С	70	W1	M+S 🕸


Technical data subject to change without prior notice.

Recommended vehicle types and position









Recommended position



HANKOOK TYRE UK LTD.

Fawsley Drive, Heartlands Business Park, Daventry, Northamptonshire, NN11 8UG, UK. Tel: +44 (0)1327 304100 Fax: +44 (0)1327 304110 www.laufenn.com